



#### CONTROL BOARD

The control board includes:

- Switch with release coil.
- Thermal protection.
- Laser instrument for the maximum cutting precision.



#### EXTENSION SIDE BENCH

It is very practical when need to cut large size of tiles and marble slabs.

#### OPTIONAL



#### STORAGE

Built to reduce at the minimum the encumbrance during the carriage and above all the storage space.

# CLASSplus

## TILE AND MARBLE BRIDGE SAWS

*Designed and made in Italy*

	Art. 661101	Art. 661100	Art. 66901	Art. 66900
DIAMOND DISK (special gres included)	Ø250 mm. (int Ø25,4 mm.)			
ENGINE	230V   50Hz   1400W			
ROTATION SPEED	2800 rpm.			
MAX CUTTING LENGTH (thickness ≤ 42 mm)	1050 mm.		850 mm.	
MAX CUTTING LENGTH (thickness > 42 mm)	910 mm.		710 mm.	
MAX SIZE TILE FOR DIAGONAL CUT (thickness ≤ 42 mm)	740 x 740 mm.		600 x 600 mm.	
MAX SIZE TILE FOR DIAGONAL CUT (thickness > 42 mm)	645 x 645 mm.		500 x 500 mm.	
MAX CUTTING DEPTH	65 mm.		65 mm.	
MAX CUTTING DEPTH AT 45°	53 mm.		53 mm.	
WORKING TABLE SIZE	1084x523 mm.		882x523 mm.	
WATER RECYCLING PUMP TYPE	S0 Type			
KIT WHEELS	Standard	Optional	Standard	Optional
LASER INSTRUMENT	Standard	-	Standard	-
DIMENSION MACHINE IN SERVICE	1505 x 675 x h. 1300 mm.		1305 x 675 x h. 1210 mm.	
DIMENSION MACHINE IN STOCK	720 x 1600 x h. 940 mm.		720 x 1300 x h. 940 mm.	
DIMENSION 3 MACHINES ON PALLET	720 x 1600 x h. 2260 mm.		720 x 1300 x h. 2260 mm.	
NET WEIGHT	50 Kg.	47 Kg.	46 Kg.	43 Kg.



**BATTIPAV**<sup>TM</sup>  
MACCHINE PER EDILIZIA | MACHINES FOR BUILDING

Z. i. 2 - Via Cavatorta, 6/1 | 48033 Cotignola (Ra) | ITALY  
Tel. +39 0545 40004 | Fax +39 0545 41724  
www.battipav.com | sales@battipav.com

AUTHORIZED DEALER:




January 2016



#### APPLICATION

Built to cut on porcelain stoneware, tiles and marble.

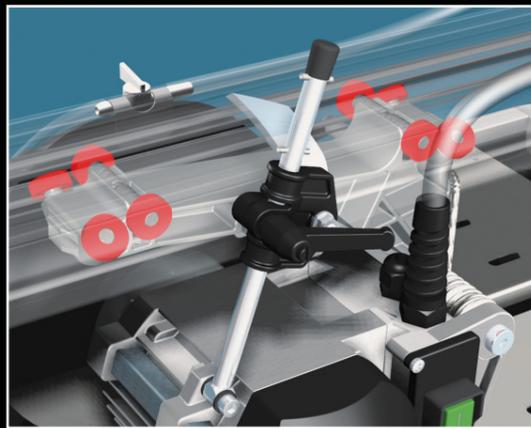

The carriage engine group slides with 8 ball-bearings on interchangeable stainless steel track. So doing the sliding is very fast and precise.




**TILE SUPPORT**  
Very precise tile support with millimetric scale of quick reading.



Position 45° angle cuts.



The cutting head is horizontally pivoted and can be locked at the intended height. It makes every kind of shape.

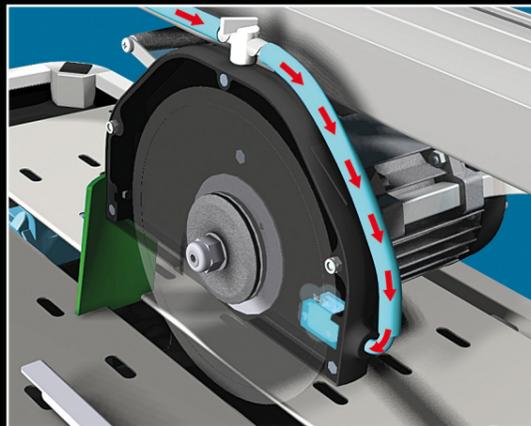

**Spray system**  
DISK'S LUBRICATION



ORIGINAL RECYCLING PUMP

POWERFUL MOTOR



**FastLEG**  
LEG FASTENING SYSTEM

**wdec**  
WATER DECANTING SYSTEM