

SPECIFICATIONS


Dimension	Metric	British
Max. Working Height(Indoor) A	6.50m	21ft 4in
★ Max. Working Height(Outdoor)	5.60m	18ft 4in
Max. Platform Height(Indoor) B	4.50m	14ft 9in
★ Max. Platform Height(Outdoor)	3.60m	11ft 10in
Overall Length C	1.44m	4ft 9in
Overall Width D	0.76m	2ft 6in
Overall Height(Rails Up) E	2.00m	6ft 7in
Overall Height(Rails Down) F	1.64m	5ft 5in
Platform Size(Length ×Width)	1.29m×0.70m	4ft 3in×2ft 3in
Platform Extension Size G	0.60m	2ft
Ground Clearance(Stowed/Raised)	0.06m/0.015m	2in/1in
Wheelbase H	1.05m	3ft 5in
Turning Radius(Inside/Outside)	0.40m/1.55m	1ft 4in/5ft 1in
Tyres	φ230×80mm	φ230×80mm

240kg	529lb
100kg	220lb
2/0	2/0
2/1	2/1
25%	25%
> 4.0km/h	> 2.49mph
> 0.4km/h	> 0.25mph
1.5°/3°	1.5°/3°
28/22sec	28/22sec
	100kg 2/0 2/1 25% > 4.0km/h > 0.4km/h 1.5°/3°

Weight			
Overall Weight	950kg	2094lb	

Power		
Hydraulic Tank	3L	0.6gal
Battery	24V/85Ah	24V/85Ah
Charger	24V/15A	24V/15A
Driving Motor	2x24VDC/0.4kW	2x24VDC/0.4kW
Lifting Motor	24VDC/1.2kW	24VDC/1.2kW

Note: Parameters with "★" are optional

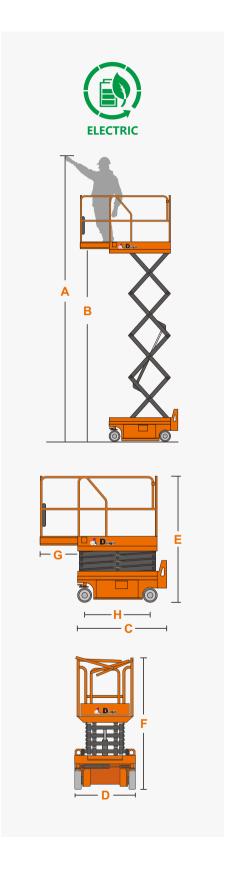





FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Drivable At Full Height
- Non-Marking Tyres
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Braking System
- Emergency Descent System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Automatic Pothole Protection
- Drive Enable
- · Charging Indicator
- · Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Platform Load Sense System
- Emergency Stop Button



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











